



Shanghai Huishi Package Material Co.,Ltd.

HS-3008

Acrylic Foam Tape


Technical Data

August, 2017

**Product Description**

Acrylic foam tape made with acrylic foam which is viscoelastic in nature. It is ideal for use in many interior and exterior bonding applications. In many situations, they can replace rivets, spot welds, liquid adhesives and other permanent fasteners.

Product Construction	Carrier	Adhesive	Total Tape Thickness W/O Liner	Tape Color	Liner
	Acrylic foam	Acrylic adhesive	0.8mm	Clear/gray/white/black	Red/green PE film liner

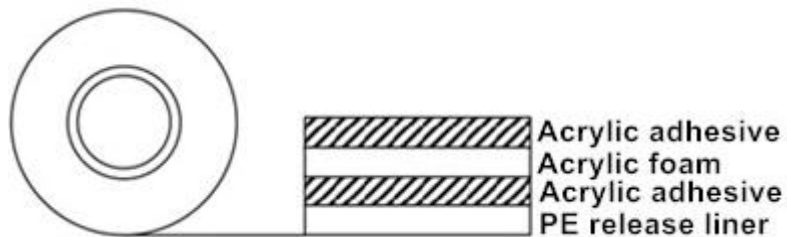

**Typical Physical Properties**

Note: The following technical information and data should be considered representative or typical only, and should not be used for specification purpose

		Test Method
Adhesion to Steel:	≧ 20N/25mm	GB/T 2792 -2014
Holding power:	≧ 24H	GB/T 4851-2014
Total Thickness(W/O liner):	0.8mm	GB/T 7125-2014
	≧ 320°F (160°C)	Short time 4H Static 100g hang Long time 10000min
Temperature Use Range:	≧ 248°F (120°C)	Static 250g hang

**Features**

- Excellent adhesion to a broad range of surface energy
- Outstanding durability performance
- A variety of color and release liner types
- Excellent solvent and moisture resistance
- High temperature resistant
- Easy for die cutting

- 
- |                          |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Application Ideas</b> | <ul style="list-style-type: none"><li>• Replacing mechanical fixation such as screws, rivets, liquid adhesives and other permanent fasteners.</li><li>• Mounting of signs and nameplates in display exhibition industry</li><li>• Vehicle interiors and exteriors of automotive industry</li><li>• For window glazing or metal bonding</li><li>• Best die-cut tape to mount various of precision molded parts</li></ul> |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
- 

<b>Storage</b>	Store under normal conditions (25 °C ± 2 °C) * (65% ± 5% RH) avoid direct sunlight in the original packaging material
----------------	-----------------------------------------------------------------------------------------------------------------------

---

<b>Shelf Life</b>	To obtain best performance, use this product within 12 months from date of manufacture.
-------------------	-----------------------------------------------------------------------------------------

---

<b>Technical Information</b>	The technical information, recommendations and other statements contained in this document are based upon tests or experience that we believe are reliable, but the accuracy or completeness of such information is not guaranteed.
------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

<b>Product Use</b>	Many factors beyond HS's control and uniquely within user's knowledge and control can affect the use and performance of a HS product in a particular application. Given the variety of factors that can affect the use and performance of a HS product, user is solely responsible for evaluating the HS product and determining whether it is fit for a particular purpose and suitable for user's method or application.
--------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

<b>Limitation of Liability</b>	Except where prohibited by law, HS will not be liable for any loss or damage arising from the HS product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability
--------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

This Industrial Adhesives and Tapes was manufactured under a quality system registered to ISO 9001:2015 standards.

**HS holding**  
**Shanghai Huishi Package Material Co.,Ltd.**

5 Floor, Building B1, No. 161, Zhenye Road, Dongjing Town,

Songjiang District, 201619 Shanghai, China.

Tel: +86 021 67690018

Fax: +86 021 67690873

Web: [www.chinahstape.com](http://www.chinahstape.com)